



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.


In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed 

Dated 14 November 2003

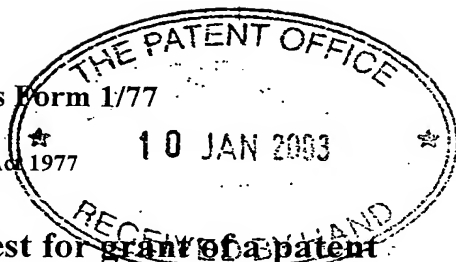

The
Patent
Office

1177
13JAN03 E776364-7/C03008
P01/7700 0-00-0300629.3

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference	AF-58222		
2. Patent application number (The Patent Office will fill in this part)	10 JAN 2003	0300629.3	
3. Full name, address and postcode of the or of each applicant (underline all surnames)	GCC Management Limited P.O. Box 68133 Kowloon East, Kowloon Hong Kong		
Patents ADP number (if you know it)	769939 0003		
If the applicant is a corporate body, give the country/state of its incorporation			
4. Title of the invention	A TONER CARTRIDGE FOR AN IMAGE FORMING APPARATUS		
5. Name of your agent (if you have one)	LLOYD WISE		
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	Commonwealth House 1-19 New Oxford Street London WC1A 1LW		
Patents ADP number (if you know it)	117001		
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications (and if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month/ year)
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application		Date of filing (day / month/ year)
8. Is a statement of inventorship and of right to grant of a patent required in support of this request (Answer 'Yes' if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))	Yes.		

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

Description 17

Claim(s) 3

Abstract

Drawing(s) 12 *752*

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translation of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*) 1

Request for substantive examination (*Patents Form 10/77*)

Any other documents
(*please specify*)

11.

I/We request the grant of a patent on the basis of this application.

Signature

LW

Date

10th January 2003

LLOYD WISE

12. Name and daytime telephone number of person to contact in the United Kingdom

Miss Alice Findlay 020 7571 6200

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.

b) Write your answers in capital letters using black ink or you may type them.

c) If there is not enough space for all relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.

d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.

e) Once you have filled in the form you must remember to sign and date it.

f) For details of the fee and ways to pay, please contact the Patent Office.

BEST AVAILABLE COPY

Patents Form 1/77

A TONER CARTRIDGE FOR AN IMAGE FORMING APPARATUS

The present invention relates to an electrophotographic toner cartridge, including a photosensitive member and process means, detachably mounted in an apparatus for forming images, hereinafter described as a toner cartridge.

The concept of a removable toner cartridge was disclosed in US 3,985,436 which discloses a copying apparatus in which the serviceable parts, including a photosensitive member and a developer unit, are mounted in a casing which can be easily withdrawn and removed from the main unit in order that service of the consumable parts might take place.

US patent US 4,538,896 discloses a toner cartridge which is intended to be completely discarded after use and replaced with a new one. This allows the user to perform a preventive maintenance task without specialised assistance from a service technician.

Accordingly in the art, a toner cartridge is designed to contain those elements, central to the xerographic process, which wear or are consumed within the selected preventative maintenance period. These include toner or developer, which are entirely consumed. Other components include an electrophotographic drum or belt; developer roller; triboelectric charging blade, drum or belt; cleaning blade; and developer roller; all of which wear or are consumed to some degree during the life of the toner cartridge.

Elements which may or may not be included in the toner cartridge include a light source for erasing remaining charge on the electrophotographic drum or belt and a transfer roller for transferring the developed image from the drum or belt and on to paper or other media. The decision as to whether these and other elements would be contained in the toner cartridge would depend on the expected life or preventative maintenance interval of those components relative to the life of the toner or developer which is fully consumed. Another factor is the cost of the component as the user would not wish to replace high cost items unnecessarily.

Within a toner cartridge of this type, various components including the drum or belt and the developer roller, are required to rotate. In the art the rotation force is provided by an electric motor which is not included inside the toner cartridge. The motor is usually provided as part of the imaging apparatus ("host machine") because it is regarded as a long lasting component of relatively high cost. In addition the motor must be quite rugged to provide the torque necessary to drive the rotating elements within the toner cartridge. As well as inherent frictions, there are blades which are forced against the rotating components which act against the rotation of those components. These may include a triboelectric charging blade acting against the rotation of the developer roller and a cleaning blade acting against the electrophotographic drum or belt.

Hence in the art there is provided a coupling between the host machine and the toner cartridge which transmits a rotational driving force of fairly high

torque from an electric motor in the host machine to one or more rotational elements in the toner cartridge.

Early cartridges (US 4,591,258) had a pin coupling arrangement driving a flange mounted into one end of the electrophotographic drum contained in the toner cartridge. A gear was formed about the perimeter of the flange which when driven from the pins, in turn provided drive to a mating gear fitted on the developer roller.

Later cartridges (US 4,829,335) utilised a helical gear around a similar drum flange. A driving helical gear in the host machine provided drive to the electrophotographic drum via the flange, which in turn provided drive to the developer roller via a third helical gear.

The same driving force, from an electric motor in the host machine, can be used to rotate a transfer roller, even if the transfer roller is not part of the toner cartridge and is in fact part of the host machine itself. This drive can be coupled from the electrophotographic drum either at the non-drive end (US 5,875,374) or the same end as the helical gear arrangement (US 5,825,472).

A further development in the art involves a non-circular projection axial to the electrophotographic drum and projecting axially outwards from the helical gear flange. This projection is driven by a reciprocally shaped socket which engages the projection as the toner cartridge is installed in the host machine (US 5,903,803).

Inherent in all the above designs is the fact that the rotational elements of the toner cartridge are driven from one axial end of the electrophotographic drum. This driving method is likely to impose twisting and torsional forces on the elements inside the toner cartridge, thus affecting their precisely set relationship.

The present invention utilises a shaft extending all the way along the axial length of the drum to receive drive from the host machine. This drive is then transmitted from the shaft to various rotating elements of the imaging system.

An advantage of the invention is the effective transmission of a high torque without imparting undue twist on the toner cartridge or the photosensitive drum contained within the cartridge.

Another aspect of the invention is the use of an aluminium end-piece to support the photosensitive drum at at least one end. This enables a high precision assembly and also provides a conductive path from the inside of the drum to the shaft and thence to a machine ground.

The invention will now be described by way of example with reference to the accompanying drawings in which:

Fig 1 is a schematic of a typical known electrophotographic copier or printer.

Fig 2 shows the rotational elements of a typical known toner cartridge

Fig 3 is a schematic and perspective of a prior art pin coupling drive arrangement

Fig 4 is a schematic and perspective of a prior art helical gear arrangement

Fig 5 is a schematic and perspective of a prior art axially driven arrangement using a twisted triangular recess driving a twisted triangular projection.

Fig 6 is a simplified schematic and perspective showing drive transmission to a central shaft of a toner cartridge of a first embodiment of the current invention

Fig 7 is a cross section of a toner cartridge of the first embodiment showing the full length of a shaft and electrophotographic drum arrangement.

Fig 8 shows an alternative shaft arrangement where the driven end of the shaft is square cut;

Fig 9 shows an embodiment of the current invention incorporating a shaft of square cross section

Fig 10 is an embodiment of the current invention representing an axially driven system where the driven shaft is of circular section with a driven pin to receive rotational force;

Fig 11 is a further embodiment of an axially driven system, this time driven by a twisted triangular recess, the driven correspondent member being a twisted shaft of triangular cross section;

Fig 12 is a perspective view of the shaft employed in Fig 11.

Technology background

This invention relates to a toner cartridge which forms a part of an image forming apparatus and contains process means for forming an electrophotographic image on a photosensitive drum and which in normal use would be replaced by unskilled users. The image forming apparatus may be an electrophotographic copier; a laser beam printer; a fax machine; or a combination of either or all of these. The process means may comprise a magnetic brush system for transporting mono- or dual component developer from locations in one or more hoppers to a developing station whereby the developer and/or toner is presented to a latent image on the photosensitive drum. Other process means may comprise the charging mechanism for the photosensitive drum; the transfer mechanism; and/or the cleaning mechanism.

With reference to Figure 1, an image forming apparatus such as an electrophotographic copying machine can be divided into four sections. The so-called base engine (A) comprises the paper handling mechanisms which feed the paper from a storage cassette (3) through an image receiving section (4) to a fixing unit (5) which employs temperature and pressure to fix the image onto the receiving medium. There is then an output tray (6) to which the medium is fed. The second section is the image forming section (B) which comprises a light source (7) illuminating an image to be copied (8), this illumination being reflected off the subject image through an optical system (9) and finally focused on to a photosensitive drum (10). The photosensitive drum is part of the third main section which may be termed the xerographic section (C). The drum (10) is charged by a charging device (11) prior to exposure to said light image. Having rotated past the image receiving section (12) where the charged surface is selectively discharged to form an electrical version of the image (latent image) the surface of the photosensitive drum passes a development zone (13) where a layer of toner and/or developer (14) is exposed to the latent image and electrostatic and/or magnetic forces cause the toner to transfer to the surface of the drum in the pattern of the latent image. The drum rotates further to a transfer section (4) where electrical and/or electrostatic forces cause the toner to transfer to the receiving medium. Any toner or developer remaining on the drum is cleaned off at a cleaning station (15). The fourth section, D, of such a copying device is the control electronics which comprise power supplies and controllers for supervising the various operations of the machine.

(In digital applications such as laser beam printers or digital copiers, section B differs in that a laser beam is used to generate the light image. The beam is modulated or pulsed to form "light dots" which are scanned in a raster fashion across the photosensitive drum. Section D differs in that substantial hardware and software might be dedicated to image preparation and rasterisation of the page image. Sections A and C can be very similar to the electrophotographic copier described above).

In this embodiment many of the consumable items of the machine are contained in section C. Section C comprises a removable toner cartridge which may be removed by the user (a) during the life of the toner cartridge to clear paper jams or to exchange for a toner cartridge containing toner of a different colour; or (b) when the toner powder contained in the hopper (16) is exhausted and the user either discards the toner cartridge or (preferably) returns the toner cartridge for refurbishing and recharging.

Prior art cartridge drive systems

A schematic of a typical prior art toner cartridge (equivalent to the elements of section C in Fig. 1 and showing the same numbering) is shown in section in Fig 2. The directions of rotation of the various process elements are indicated. In the prior art the drum can be driven from the host machine by a pin coupling (Fig 3); a helical gear (Fig 4); or a non circular axial projection (Fig 5). In all three cases the first recipient of the drive force from the host machine is a flange inserted and fixed into one end of the electrophotographic

drum. Typically this flange is fabricated by injection moulding a resin such as polycarbonate or acetal or any other engineering grade injection mouldable resin.

In Fig 3 the drum flange (17) is rotationally mounted in the casing (25) of the toner cartridge and is driven axially by pins (53) projecting from a gear unit (52) in the host machine. Gears 51 and 52 are caused to rotate by an unshown electric motor in the host machine and thus the drive pins (53) drive the electrophotographic drum in the toner cartridge via the flange (17) which is rigidly fixed into one end of the electrophotographic drum using a strong adhesive. Around the periphery of flange (17) a helical gear (17a) is cut which serves to transmit the driving force to a developer roller (not shown) inside the cartridge.

The cartridge is mounted into the host machine in a direction axial with the drum such that the electrophotographic drum in the cartridge engages with the coupling pins. The pins might be spring loaded so that if the drive protrusions are initially not aligned, they can spring into place as the electric motor starts to rotate the driving assembly.

Fig 4 is another example of the prior art. However in this case the electrophotographic drum (10) in the cartridge casing (25) is driven radially. Like the flange (17) in Fig 3, the flange (19) in Fig 4 has a helical gear (19a) around the periphery, but which this time serves two purposes: firstly to

receive drive from a helical drive gear (54) in the host machine; and secondly to transmit this drive to an unshown developer roller in the cartridge.

In the case of Fig 4 the cartridge is loaded in a direction transverse to the axis of the drum, such that the driving gear (54) engages the driven flange (19). One of the gears has enough play to ensure smooth loading.

Fig 5 is a further prior art example where the electrophotographic drum (10) is driven axially. In this case the driving member (55) in the host machine has a twisted triangular recess which engages a twisted triangular projection (21a) moulded integrally with the drum flange (21). As with Fig 3 the cartridge is loaded in the axial direction and the driving member might have to be spring loaded such that the drive train can rotate until the correct engagement position is found.

First embodiment of current invention

Fig 6 shows an embodiment of the current invention wherein the driven element in the cartridge is in the form of a shaft which extends entirely through the centre of the drum along the axis of the drum. The shaft (24) is mounted in the toner cartridge casing (25) at either end in a manner which allows the shaft to rotate relative to the casing. One or both ends of the shaft is supported in a bushing (33) which may be conductive in order to keep the shaft earthed, through sliding contact with a grounded contact in the host machine (not shown).

Drive from the host machine is transmitted radially via a driving gear (54) which communicates with a driven gear (23) in the cartridge. The driven gear is mounted onto the shaft in such a way that the drive is transmitted to the shaft. This can be achieved by cutting one or more flats (28) on the shaft and profiling the bore of the gear (23) to fit onto the shaft such that within the limits of constructional tolerances there is substantially no relative rotation between gear and shaft.

The toner cartridge is mounted into the host machine in a direction transverse to the axis of the electrophotographic drum (10). The host machine's driving gear (54) meshes with the cartridge's helical gear (23) and drive is thus imparted to the shaft when the motor in the host machine (not shown) is switched on. The speed of rotation of the shaft is dictated by the host machine's motor speed and the gear ratio.

The general cross section of the shaft in this embodiment is circular except for flat portion(s) (28) machined onto the shaft to enable drive to be transmitted from the helical gear to the shaft.

Fig 7 shows a cross section of both ends of such a system, but also showing at both ends a different bearing arrangement incorporating earthing of the shaft and hence the photosensitive drum. The drive to the cartridge's photosensitive drum is transmitted via a flange (30) at the opposite end of the drum from the drive-receiving end of the shaft. The flange (30) is injection

⌒ moulded from a polycarbonate or other engineering plastic which may be glass filled and in this embodiment contains a gear on its outer circumference (the portion not inserted into the drum) to transmit drive from the shaft to a transfer roller in the host machine (not shown). The flange is a press fit into the drum and a sliding fit on the shaft. A D-shape in the inner bore of the flange locates onto a portion of the shaft machined with a flat (31) in order that the drum and the transfer roller may be driven.

The photosensitive drum (10) is mounted onto the shaft by the above flange (30) and at the other end by means of a metal disk (29). It will be noted that there is no relative movement between the drum and the shaft because they are both rotating at the same speed. In this embodiment the end of the drum nearest the helical gear (23) is supported by a centre-drilled metal disk (29) which is a press fit into the internal diameter of the drum and a sliding fit on the shaft. The functions of this disk are firstly to conduct charge from the inside wall of the drum to the host machine's ground via the shaft and the contact arrangements at an end of the shaft; and secondly to support the drum in a position precisely concentric with the shaft. Preferably the disk should be fabricated from the same material as the drum substrate (e.g. aluminium) to eliminate any differential expansion or contraction under the influence of ambient heat or cold. The disk can be a machined component or it can be pressed out of sheet metal or drawn into a cup shape.

⌒ In this way the torsion generated by the driving resistance of the cartridge system is borne by the shaft and not by the electrophotographic drum as in the prior art systems.

A summary of the drive transmission system is as follows:

Host machine motor and drive gear (54) to cartridge helical gear (23) in Figs 6 and 7

Helical gear (23) to shaft (24) using D-flat principle

Helical gear (23) to developer roller drive gear in cartridge (not shown)

Shaft (24) to flange (30) in opposite end of the electrophotographic drum using D-flat principle

Flange (30) to photosensitive drum (10) using press fit or gluing of flange into inner diameter of photosensitive drum.

Flange (30) to transfer roller in host machine (not shown) via transfer roller drive gear

Other rotational elements which might be driven directly from the shaft include a toner stirring system but this is not detailed here.

Grounding of the inner surface of the photosensitive drum

As part of the xerographic operation the photosensitive coating on the drum is charged and then by the action of selected points of light, discrete areas of the photosensitive coating become conductive and the charge conducts to the

inner surface of the drum, from where it needs to be provided with a path to ground.

In this embodiment the metal washer (29) provides a conductive path from the inner surface of the drum to the shaft. There is then a facility at each end of the shaft to provide electrical continuity with a contact in the host machine at either end of the shaft according to the electrical layout determined by the machine's designers.

Referring to Fig 7, the two ends of the shaft are centre drilled with shallow recesses (36a and 36b respectively). These recesses receive a dimpled portion (37a and 37b respectively) of the contact piece which may be press formed from steel or berillium copper or a similar conductive material which is easy to press form. As the shaft rotates the recess revolves around the dimpled contact portion which self centres by rotational friction and is held against the end of the shaft by the inherent spring force of the material. The dimpled portions are connected to cap portions (38a and 38b respectively) which contact against an axial spring loaded contact (not shown) in the host machine.

A summary of the photosensitive drum grounding system is as follows:

Charge is applied to the outer photosensitive surface of the drum

Charge is conducted to the inner surface of the drum when selectively stimulated by light

Charge is conducted from the drum (10) to the shaft (24) via the metal washer (29) which is a press and sliding fit respectively between them

Charge can be conducted to either of the axial ends of the shaft to contacts (36a) or (36b)

Contacts (36a) or (36b) are contiguous with conductive end caps (38a) and (38b) respectively

According to host machine design, charge is conducted from end caps (38a) and/or (38b) to the ground contact(s) provided by the host machine for this purpose

Charge flows to mains ground via the host machine's power transmission system

In this system the diameter of the drum would range from 24mm to 30mm and the shaft diameter would range from 3mm to 10mm. However it is envisaged that the same construction could be applied both to larger and smaller systems. The rotational speed of the shaft in this embodiment would typically be in the order of 50 to 150 revolutions per minute.

Further Embodiments - Gear driven systems

Although the above embodiment employs a round shaft with D-shaped portions at the positions where rotational drive is received or transmitted, a round shaft with square sections might be employed to equal effect (Fig 8).

With a square cross section it is easier to transmit and receive rotational driving force but carefull attention must be paid to bushings and supporting

parts to ensure concentricity and ease of rotation. Note in Fig 8 that the bushing (33) would rotate in a bearing portion of cartridge casing (25).

Fig 9 illustrates a similar system but in this embodiment the cross section of the shaft along its entire length is square.

Axially driven systems

Another embodiment is shown in Fig 10 where a shaft of circular cross section (60) is employed but this time the drive from the host machine is imparted axially via a non circular recess (61) on board a driving boss which in turn is driven by gears (51 and 52) in the host machine. The non-circular driving recess (61) has a maximum inscribed diameter corresponding to slightly more than the diameter of the through-shaft (60). A pin (62) engages with an element of the non-circularity to enable a rotational driving force to be transmitted to the shaft.

A further embodiment is shown in Fig 11. In this embodiment the driving recess is in the form of a twisted triangular rhomboid (63) and the through-shaft (64) receiving this drive has a triangular cross section and is twisted along its entire length with a degree of twist corresponding to that of the driving recess. According to this arrangement the shaft fits exactly into the recess and concentricity is assured even when the triangular cross section of the shaft is slightly less than that of the recess. The shaft (64) may be fabricated in steel by a swaging method.

⊖

A perspective view of the shaft is shown in Fig 12.

Claims

1. A toner cartridge for use in an electrophotographic imaging machine, comprising:

a photosensitive drum;

process means acting upon the photosensitive drum

a rotating shaft which extends through the whole length of the drum along the drum's axis.
 2. A toner cartridge according to Claim 1 where the shaft supports the photosensitive drum at both ends
-
3. A toner cartridge according to any preceding claim where the photosensitive drum rotates at the same speed as the shaft
 4. A toner cartridge according to any preceding claim where the cartridge includes a casing and the shaft is rotatably mounted in the casing of the toner cartridge.

5. A toner cartridge according to any preceding claim where there is electrical continuity between the inside surface of the photosensitive drum and the shaft
 6. A toner cartridge according to Claim 5 where the electrical continuity is provided by a mounting component which supports the photosensitive drum on the shaft.
 7. A toner cartridge according to any preceding claim where the main body of the shaft is circular in cross section.
 8. A toner cartridge according to any of Claims 1 – 6 where the shaft is of substantially square cross section.
 9. A toner cartridge according to any of Claims 1 – 6 where the shaft is of substantially triangular cross section
-
10. A toner cartridge according to Claim 9 where the shaft is twisted along the axial length.
 11. A toner cartridge according to any preceding claim where the shaft is arranged to receive a rotational driving force at one end from a driving component in the host machine which is coaxial with the shaft.

12. A toner cartridge according to any one of Claims 1 to 10 where the shaft is arranged to receive a rotational driving force at one end from a driving component in a host machine which has an axis offset from the shaft axis and where the drive is transmitted from the driving component to the shaft by a gear train.
13. A toner cartridge according to any one of Claims 1 to 10 where the shaft supports gears at either end and connects them such that they are rotatably locked with one another.
14. A toner cartridge according to Claim 13 where the gear at one end is driven by drive means external to the cartridge and the gear at the other end drives the photosensitive drum or a component which is external to the toner cartridge.
15. A shaft for use in a toner cartridge which is triangular in cross section and is twisted by at least 360° along its length.
16. A toner cartridge substantially as described herein and illustrated in Figures 6 to 12 in the accompanying drawings.
17. A shaft for use in a toner cartridge substantially as described herein and illustrated in Figures 11 and 12 in the accompanying drawings.
-

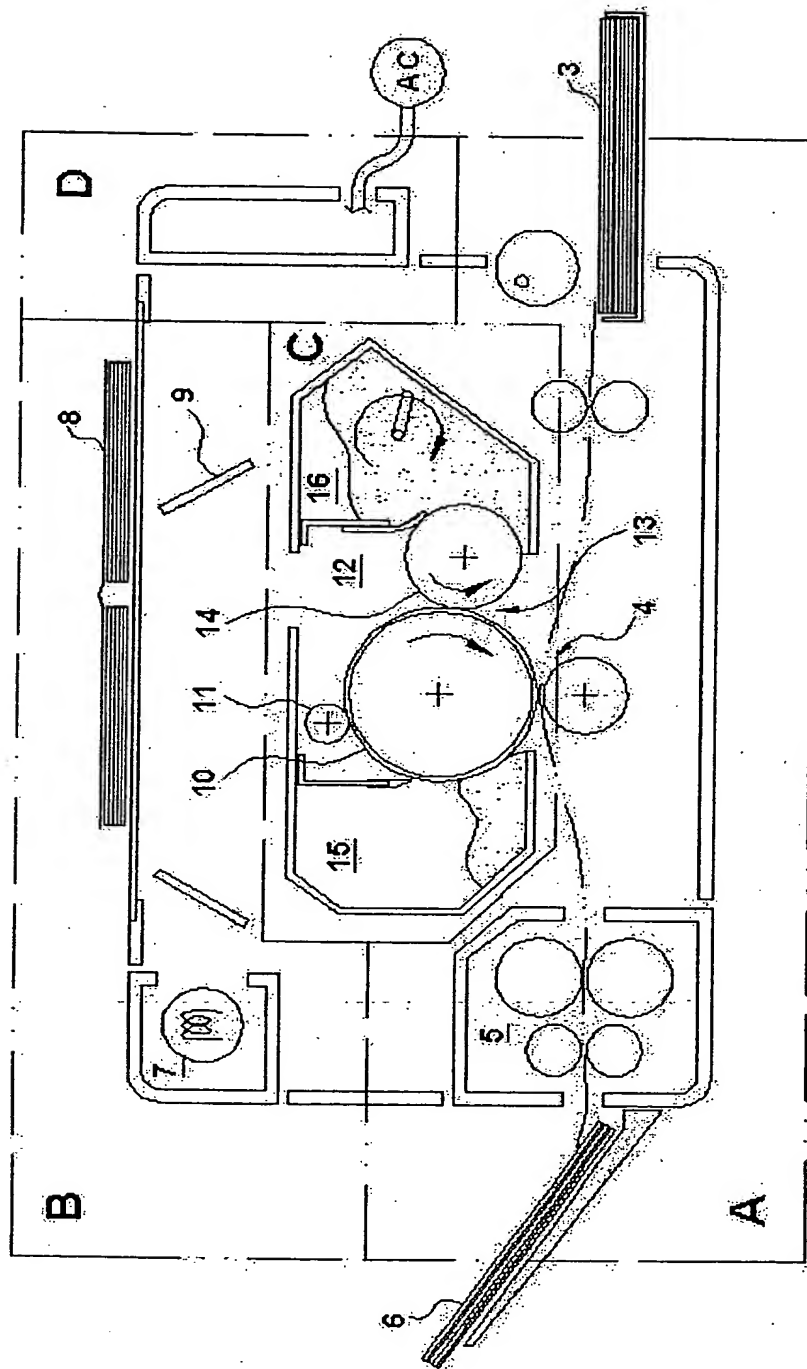


FIG.1

THIS PAGE BLANK (USPTO)



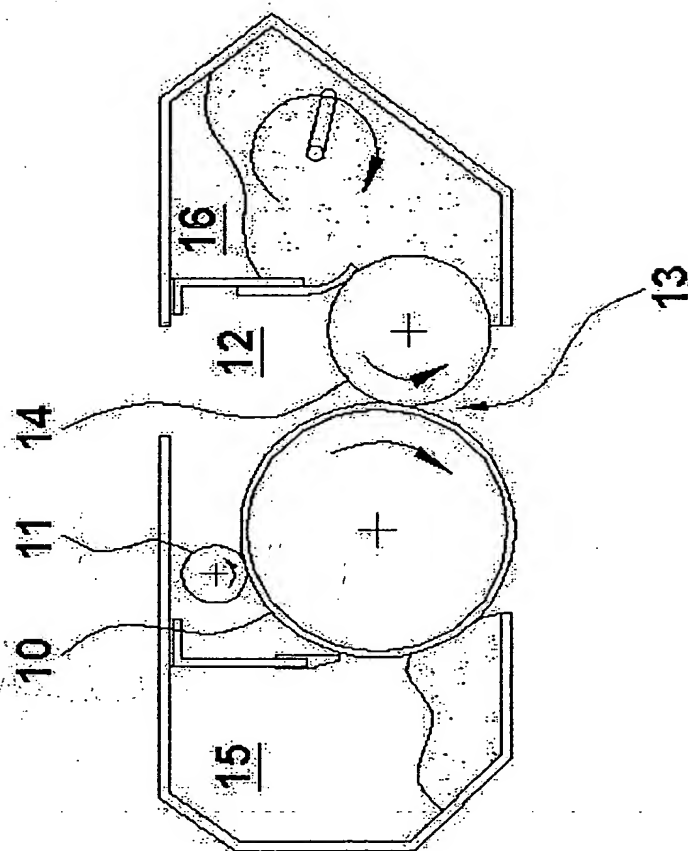


FIG. 2


THIS PAGE BLANK (USPTO)

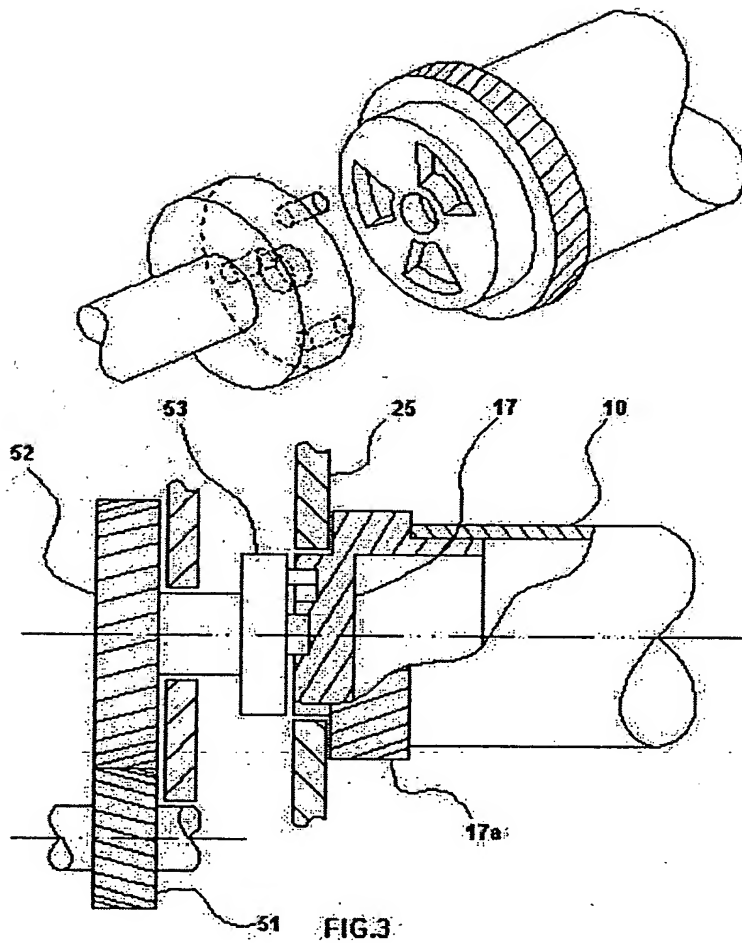

THIS PAGE BLANK (USPTO)

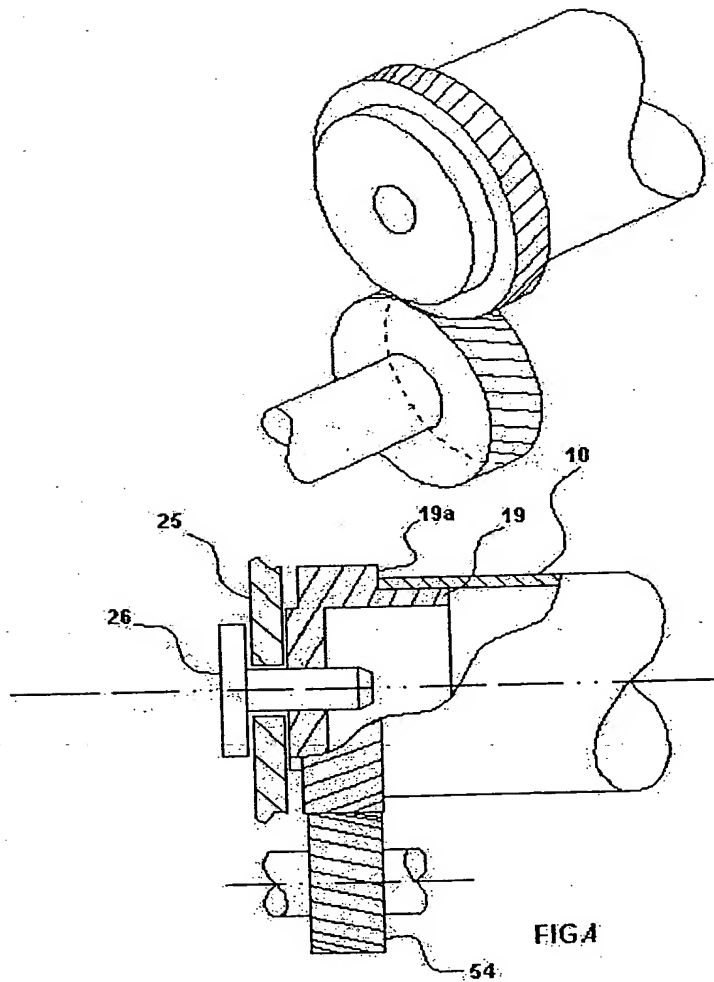

THIS PAGE BLANK (USPTO)

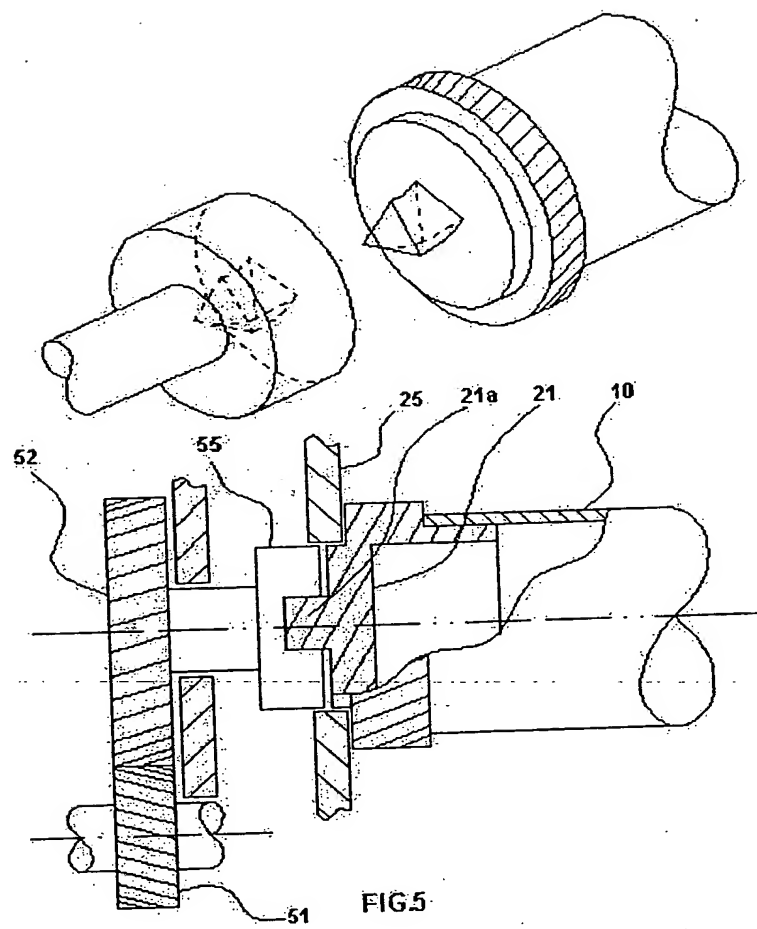

THIS PAGE BLANK (USPTO)

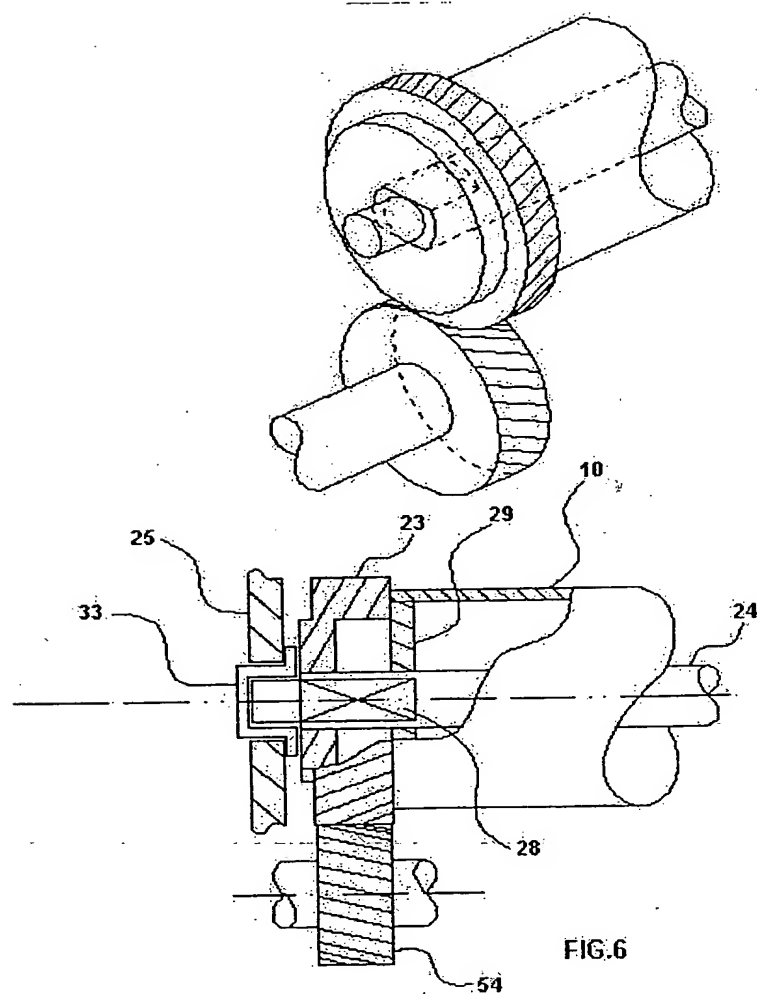


FIG. 6

THIS PAGE BLANK (USPTO)

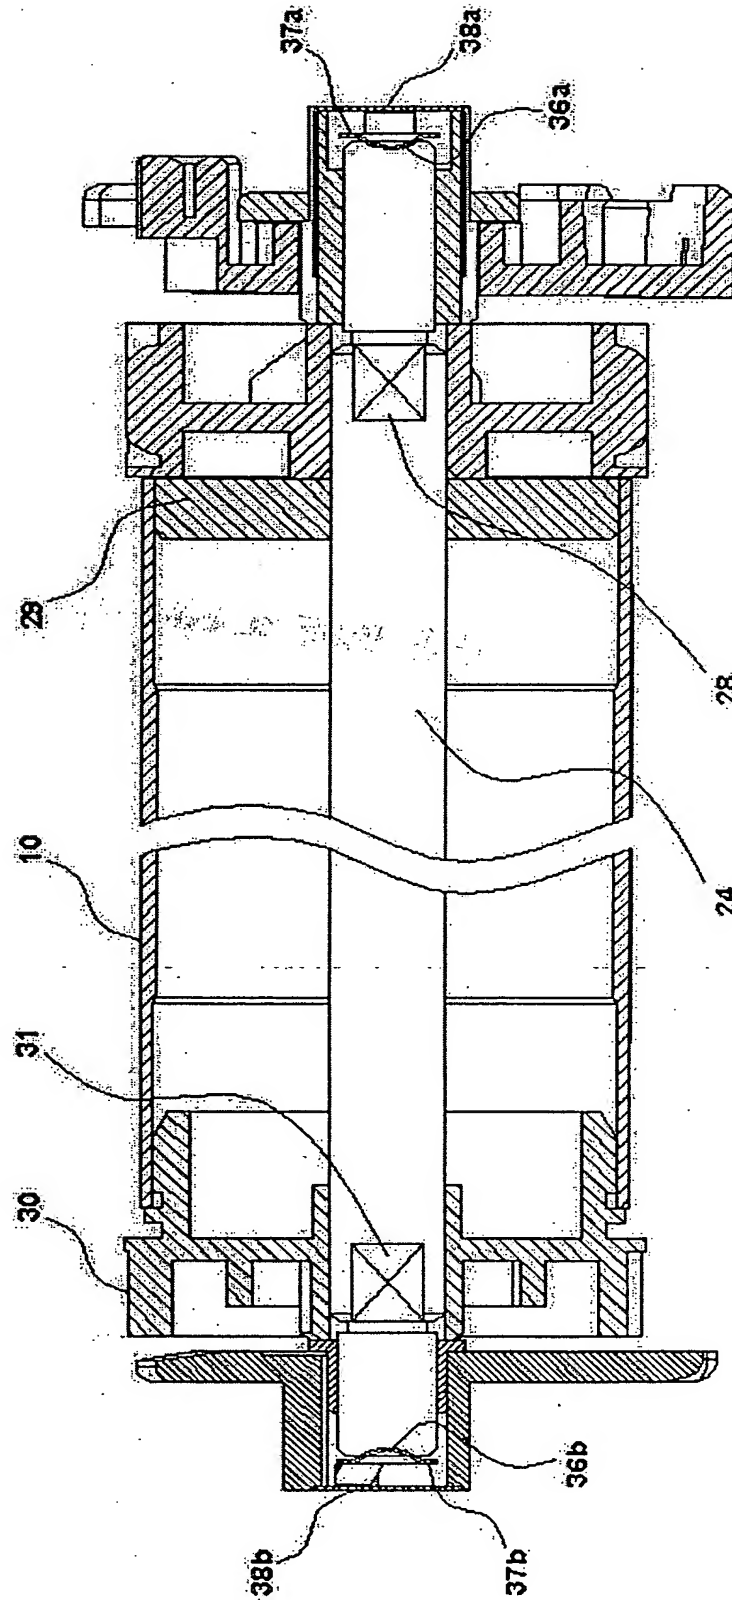


FIG.7

THIS PAGE BLANK (USPTO)


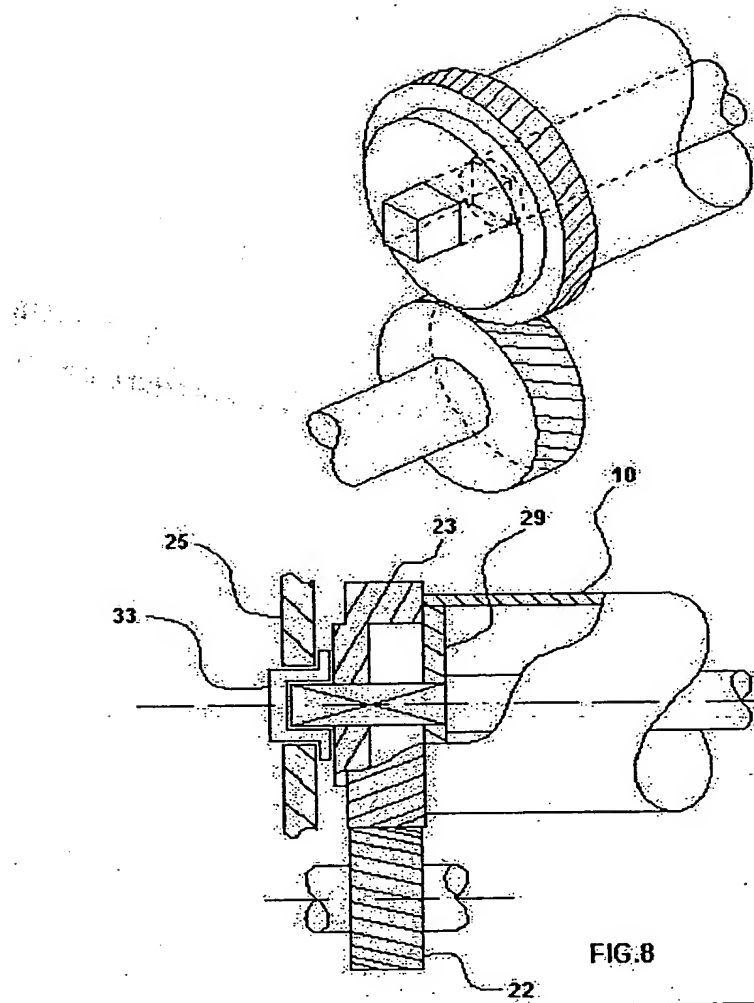


FIG. 8

THIS PAGE BLANK (USPTO)

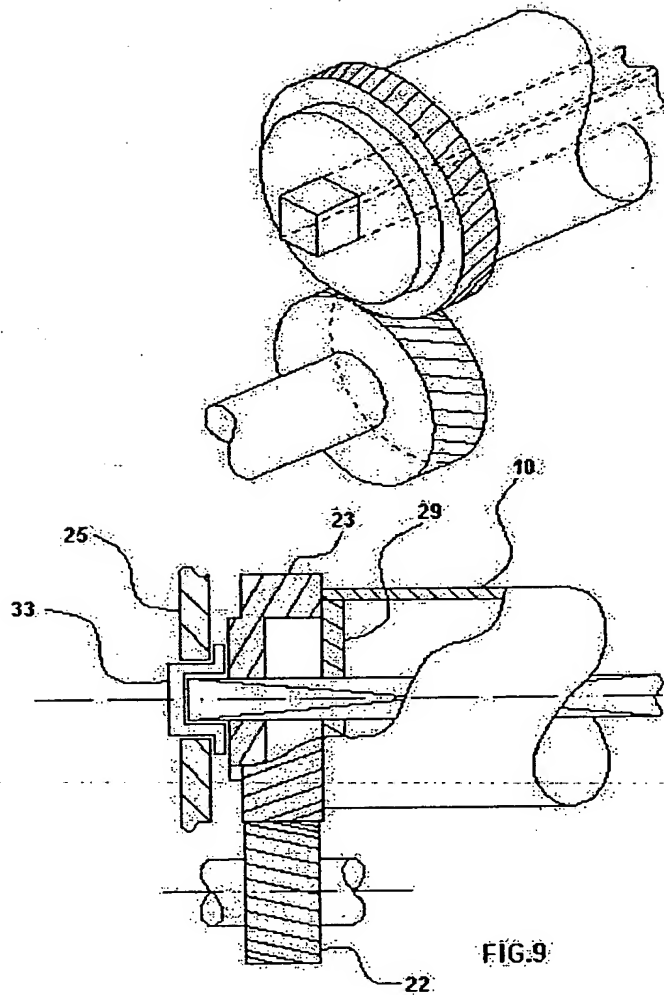

THIS PAGE BLANK (115PTM)


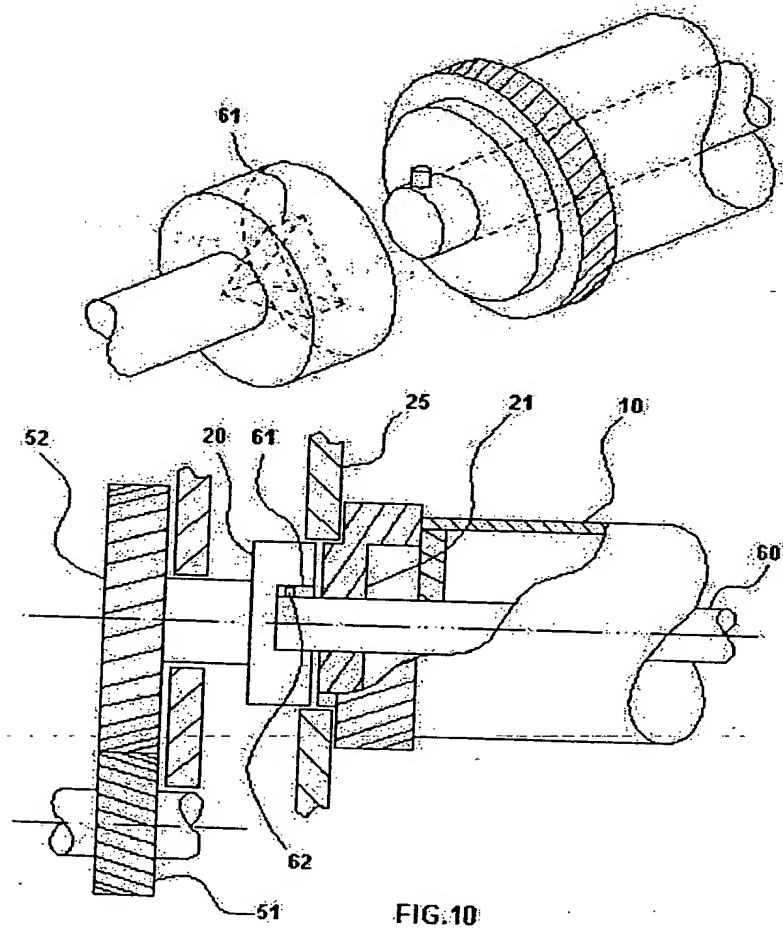


FIG. 10

THIS PAGE RI ANK (115PTO)

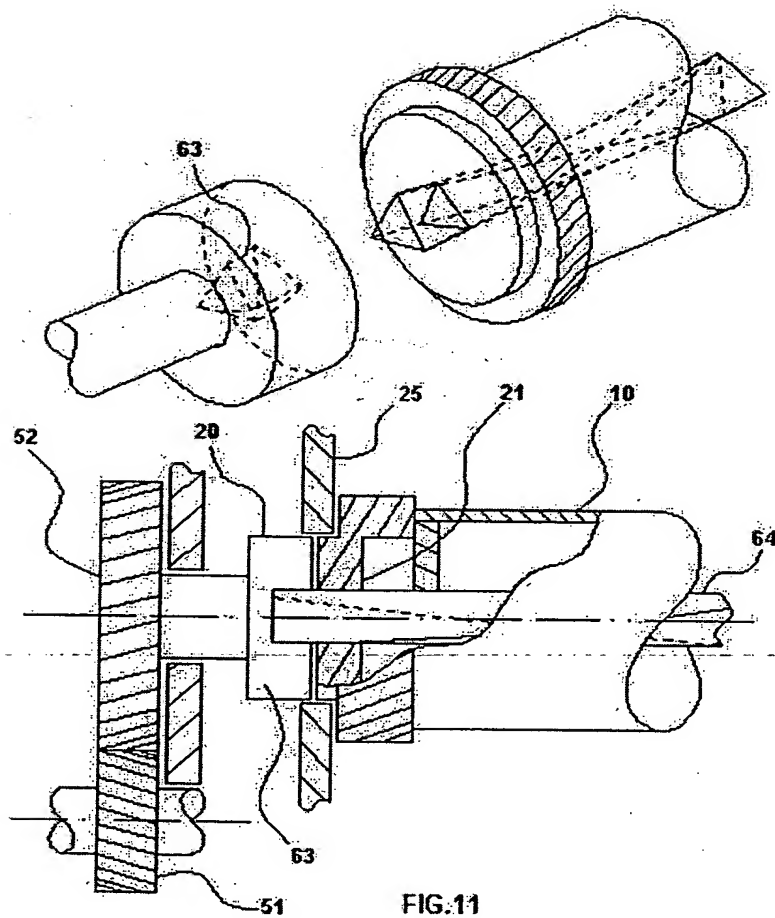

THIS PAGE BLANK (USPTO)

12/12

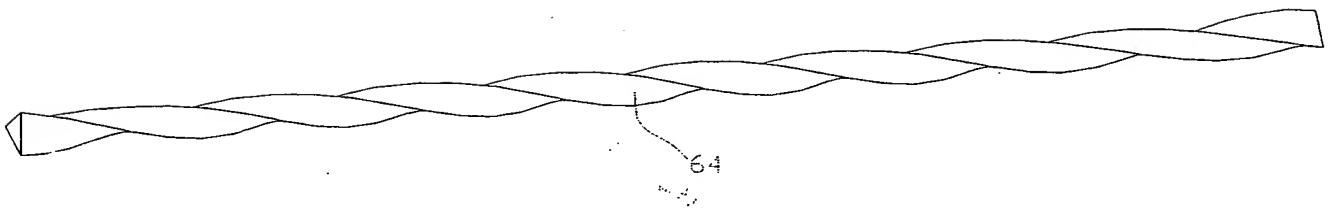


Fig 12

THIS PAGE BLANK (USPTO)